

# On-wall outlet socket FTTH 2 ports




- universal client cable termination
  - DAC cable
  - Microduct 7,0 mm
  - patchcord
- slimmest socket on the market
- designers look
- FPS system (Fiber protection System)
  - almost impossible to damage the fibers
- Individual logo on the cover
- Up-to 2 flangless SC adapters or 2 LC DX adapters
- in 7,0 mm (outer diameter) microduct or DAC cable
- DAC and microduct crimp holders
- 4 way access
- EZ-Bend access through the back of the box
- fastest installation
- intuitional fiber management
- no need to measure fibre lengths for splicing
- 2-zones: for communication and splicing
- innovative indent allowing easier fiber pick-up
- up-to 4 splice protectors
- 2 on wall mounting possibilities: on the wall, inside the electrical outlet
- screw locking system (additional option)

**DAC - direct access cable** ✓

**Microduct - 7/3,5 mm** ✓

**EZ-BEND 3,0mm** ✓

Parameters	Specification
No. of adapters	2
Max. no. of splices	4
Connectors	SC/PC, SC/APC, E2000/APC
No. of 3mm entry points	4
No. of entries from electrical outlet	1
Size: W./H./D. [mm]	86/86/16
Material	plastic
Color	white

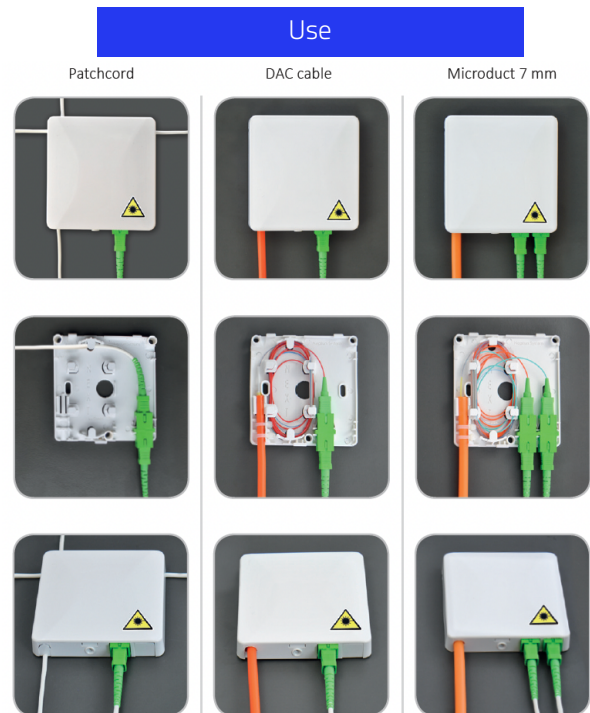

The specification on is owned and copyrighted by Fibre Konzept Sp. z o.o. Information contained herein may be changed at owner's discretion without any notice. Fibre Konzept Sp. z o.o. may not be held liable for any possible inaccuracies and discrepancies in this document.